

## 无感厚膜电阻(Non-inductive Thick Film Resistor )ZMP 200W


**无感耐高压,大功率,小体积,大大节省安装空间,必须安装在散热器上使用**  
 Non-inductive,High power,Small size,Easy mounting, mounting onto a heatsink.




### ■ 结构 (Structure)

- 采用丝网印刷方式, 印刷层几十微米厚的电阻膜, 经高温烧结而成。基体为96%三氧化二铝陶瓷, 导热系数好, 机械强度高, 电阻膜层采用贵金属钌系浆料, 电性能稳定。  
 Screen printing, resistor film printed layer with thickness of tens of microns, sintered at high temperature. The matrix is 96% aluminum oxide ceramic, with good thermal conductivity and high mechanical strength. The resistor film with precious metal ruthenium slurry, with stable electrical properties.
- 工艺流程一般是电极印制→电极烧结→电阻印制→电阻烧结→介质印制→介质烧结, 然后再经调阻、焊接、包封等工序制作而成。  
 Technological Process: electrode printing → electrode sintering → resistor printing → resistor sintering → medium printing → medium sintering, then resistance adjustment, welding, encapsulation and other processes.


### ■ 产品尺寸图表ZMP200W ( Dimension Chart)

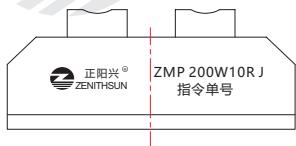

图一 (主视图)




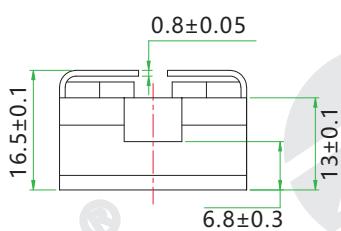


图二 (右视图)

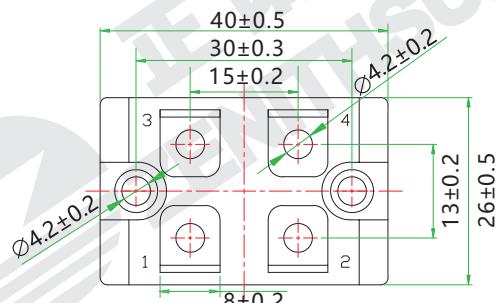

图三 (俯视图)

结构Configurations(standard version)



型号 Type	功率 Power	阻值范围 Resistance Range	精度 Tolerance	引出端 Leading	电阻安装 Mounting	电感 Inductance	极限电压(KV) Max Voltage	绝缘耐压 (KV) Insulation Voltage	净重(g) N.W	温度系数 T.C.R
ZMP	200W	0.5Ω-1MΩ	K( $\pm 10\%$ ) ~ F( $\pm 1\%$ )	端片 Terminals	M4	无感 N	1KVdc	5KVac	50	$\pm 50PPM$ ~ $\pm 260PPM$

备注: 如有特殊要求或者参数超出以上标准可协商供货  
 Note: other requests are available

### ■ 定货示例 (How to order)

ZMP	200W	20M	J	1
型号 Type	功率 Power	标称阻值 Nominal value	精度 (K: $\pm 10\%$ , J: $\pm 5\%$ , G: $\pm 2\%$ , F: $\pm 1\%$ ) Tolerance(K: $\pm 10\%$ , J: $\pm 5\%$ , G: $\pm 2\%$ , F: $\pm 1\%$ )	结构 (1-2-3-4-5) Configuration (1-2-3-4-5)

■ 无感厚膜电阻性能实验参数 (Performance Characteristics)		
项目 (Test)	试验条件 (Conditions of Test)	性能要求 (Testing Results)
电阻值容许误差 Resistance Tolerance	测试电压≤3V,环境温度25°C Testing Voltage ≤3V, Ambient Temperature 25°C	F---G---J---K
温度系数 T.C.R	$\frac{R_1-R_0}{R_0(T_1-T_0)} \times 10^6$ (PPM/°C) R0:常温(T0)下阻值 R0:Room Temperature(T0)Resistance R1:常温T0+100°C(T1)下阻值 R1:Room Temperature T0+100°C(T1)Resistance	±50PPM ~ ±260PPM
短时间过负荷 Short Time Overload	1.5倍额定功率, 但不超过最大连续工作电压的1.5倍5秒钟 1.5 times rated power for 5 seconds, but not over 1.5 times continuous Umax	$\Delta R \leq \pm(0.2\%R + 0.1\Omega)$
绝缘电阻值 Insulation Resistance	1000Vdc	$\geq 10G\Omega 1Min$
室温耐久性 Load Life	额定电压, 通电90分钟, 停30分钟, 共1000小时 At rated voltage, 90 min "On", 30 min "Off", total 1000hours	$\Delta R \leq \pm(0.5\%R + 0.1\Omega)$
耐湿性 Humidity Resistance	温度: 40±2°C 湿度: 90%-95%.240小时 Temp:40±2°C Humidity:90%-95%.240hours	$\Delta R \leq \pm(0.4\%R + 0.1\Omega)$
耐高低温试验 High/Low Temp.	产品在-55°C ~ 125°C环境条件下储存2H, 5次循环 Store at -55 °C ~ 125 °C for 2H, cycle for 5 times	$\Delta R \leq \pm(0.2\%R + 0.1\Omega)$
工作环境温度 Operating Temperature	-55°C ~ 150°C	/

■ 无感厚膜降功耗曲线图 (Derating Curve)

